


OVERVIEW

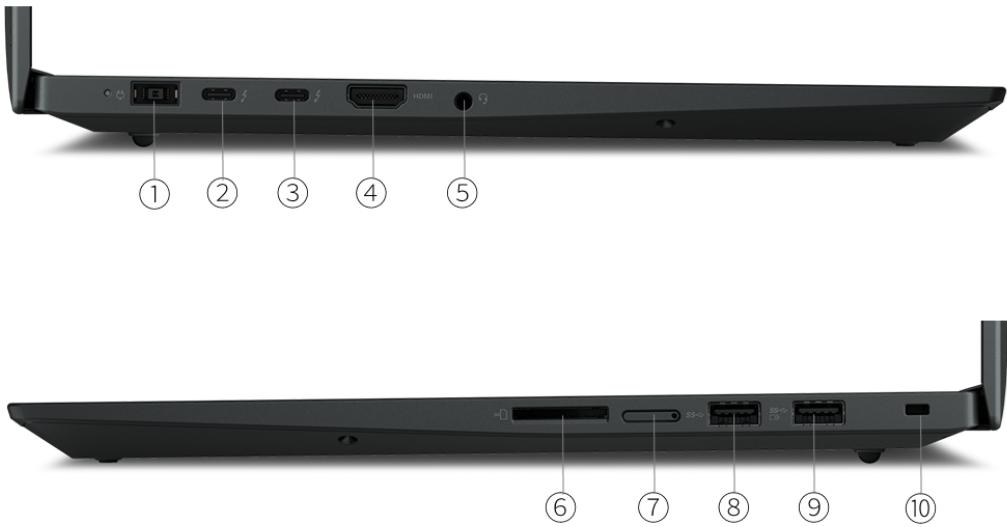

1. Power connector	6. SD card reader
2. Thunderbolt 4	7. Nano-SIM card slot
3. Thunderbolt 4	8. USB 3.2 Gen 1
4. HDMI	9. USB 3.2 Gen 1 (Always On)
5. Headphone (3.5mm)	10. Kensington Security Slot

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i7 / i9 or Intel Xeon® Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i9-11950H	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics
Xeon W-11855M	6	12	3.2GHz	4.9GHz	18MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**[1]

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64 for Workstations
- Windows 10 Pro 64
- Windows 10 Pro 64 for Workstations
- Windows 10 Home 64
- Fedora Linux
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)
- No operating system

Notes:

1. As preloaded OS, Fedora and Ubuntu Linux will be available in October 2021

Graphics

Graphics**[1]

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12
NVIDIA® GeForce RTX™ 3080 Laptop GPU	Discrete	16GB GDDR6	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12
NVIDIA RTX A4000 Laptop GPU	Discrete	8GB GDDR6	DirectX 12
NVIDIA RTX A5000 Laptop GPU	Discrete	16GB GDDR6	DirectX 12
NVIDIA T1200 Laptop GPU	Discrete	4GB GDDR6	DirectX 12
NVIDIA RTX A2000 Laptop GPU	Discrete	4GB GDDR6	DirectX 12
NVIDIA RTX A3000 Laptop GPU	Discrete	6GB GDDR6	DirectX 12
NVIDIA GeForce RTX 3070 Laptop GPU	Discrete	8GB GDDR6	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12

Notes:

1. Vapor Chamber cooling is available only with NV RTX A3000 /A4000 / A5000 and GeForce RTX 3070 / 3080 GPUs

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 4K@60Hz on NVIDIA T1200 or Intel UHD model, or 8K@60Hz on other discrete graphics model

- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type^{**}

- DDR4-3200 ECC
- DDR4-3200 non-ECC

Memory Protection

ECC on models with ECC DIMMs and Xeon processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^{[1][2]}

- One drive, up to 2TB M.2 2280 SSD
- Model with Intel UHD Graphics, NVIDIA T1200, and NVIDIA RTX A2000 Graphics:
up to two drives, 2x M.2 SSD
 - M.2 2280 SSD up to 2TB
 - RAID 0/1 support

Storage Slot^[3]

Two M.2 slots

- One M.2 2280 PCIe® Gen 3x4 slot, supports M.2 2280 SSD
- One M.2 2280 PCIe Gen 4x4 slot, supports M.2 2280 SSD

Storage Type^{***}

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	256GB / 512GB / 1TB	Opal2

RAID^[4]

RAID 0/1 support (All M.2 SSD drives will work at PCIe Gen 3 in RAID mode)

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. Dual storage is only available on models with Intel UHD graphics, NVIDIA T1200, and NVIDIA RTX A2000
3. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
4. Opal capability is not available in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader, supports UHS-II SD card

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, Dolby® Atmos®

Microphone

- Dual array microphone, far-field
- No microphone

Camera**

- FHD 1080p, with privacy shutter, fixed focus
- IR & FHD 1080p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 90Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

MobileMark® 2018: 10.9 hr
JEITA 2.0: 13.7 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**^[1]

- 135W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 230W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN

Display

Display**^{[1][2]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
16.0"	WQXGA (2560x1600)	None	IPS	400 nits	Anti-glare	16:10	1200:1	100% sRGB	170°	Low blue light, DC dimming
16.0"	WQUXGA (3840x2400)	None	IPS	600 nits	Anti-glare	16:10	1500:1	100% Adobe® RGB	170°	Low blue light, Dolby Vision™, DisplayHDR™ 400, DC dimming
16.0"	WQUXGA (3840x2400)	Multi-touch	IPS	600 nits	Anti-reflection, Anti-smudge	16:10	1500:1	100% Adobe RGB	170°	Low blue light, Dolby Vision, DisplayHDR 400, DC dimming

Color Calibration

- X-Rite® Pantone® factory color calibration
- No color calibration

Touchscreen

- Capacitive-type on-cell multi-touch, supports 10-point touch
- Non-touch

- Notes:
- 1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product.
For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
 - 2. For non-OLED display, HDR is only supported under hybrid mode.

Input Device

Pen

- Lenovo Pen Pro
- No pen (pen sold separately)
- No support (non-touch display doesn't support pen input)

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

LED backlight

UltraNav™

3-button TrackPoint® pointing device and glass surface multi-touch touchpad, 67.6 x 115 mm (2.66 x 4.53 inches)

Mechanical^[1]

Dimensions (WxDxH)

Models	Dimensions
Touch models	359.5 x 253.8 x 18.2 mm (14.15 x 9.99 x 0.72 inches)
Non-touch models	359.5 x 253.8 x 17.7 mm (14.15 x 9.99 x 0.7 inches)

Weight

Models	Weight
Non-touch models	1.81 kg (3.99 lbs)
Touch models	1.86 kg (4.1 lbs)

Case Color**

- Black
- 37-degree twill CF weave

Case Material**

- CFRP / GFRP (top), Aluminium (bottom)
- CFRP / GFRP hybrid (top), Aluminium (bottom)

- Notes:
- 1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet**

- Ethernet support via optional Lenovo USB-C® to Ethernet Adapter
- USB-C to GbE RJ-45 Dongle

WLAN + Bluetooth^{[1][2]}

Intel Wi-Fi® 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

WWAN^[3]

- Qualcomm® Snapdragon™ X55 5G Modem-RF System, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- Nano SIM Card, Lenovo Connect 24 months, 4G LTE
- No SIM card inbox

NFC

No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. 6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
3. WWAN is only available on models with Intel UHD graphics, NVIDIA T1200, and NVIDIA RTX A2000.

Ports^[1]

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4a)
- 1x SD card reader
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Nano-SIM card slot (WWAN support models)
- 1x HDMI 2.0 (model with integrated graphics)
- 1x HDMI 2.0 (model with NVIDIA T1200 graphics)
- 1x HDMI 2.1 (model with GeForce RTX graphics)
- 1x HDMI 2.1 (model with NVIDIA RTX graphics)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit

[Docking for ThinkPad® P1 Gen 4](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Nano Security Slot, 2.5 x 6 mm

Smart Card Reader

No smart card reader

Fingerprint Reader

Touch style fingerprint reader on power button, match-on-chip

BIOS Security

- Power-on password

- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

(Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^{**[1]}

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications


ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW

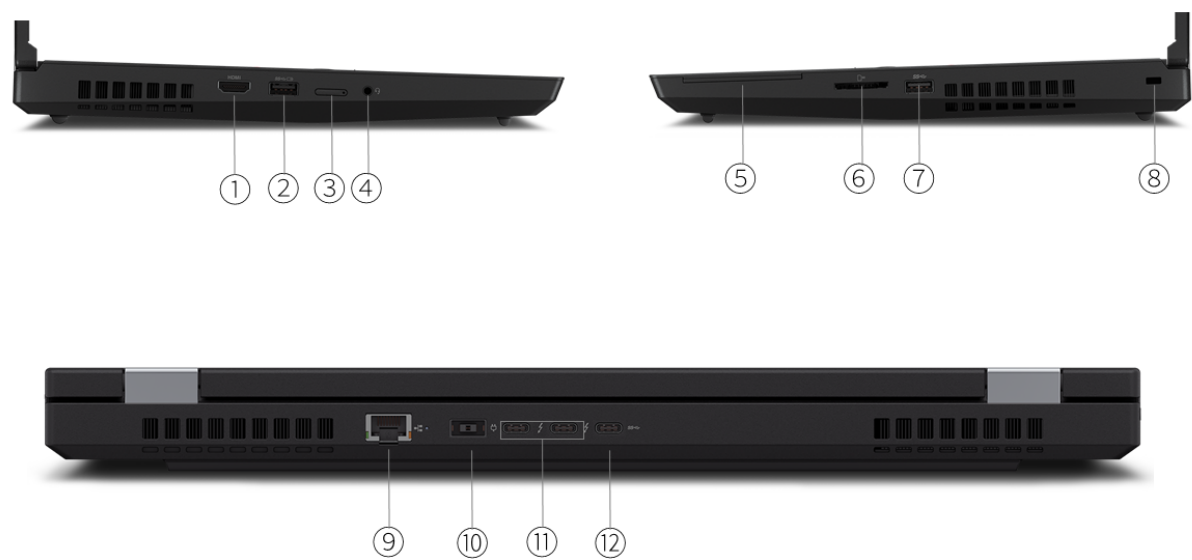

1. HDMI 2.1 / 2.0	7. USB 3.2 Gen 1
2. USB 3.2 Gen 1 (Always On)	8. Kensington Security Slot
3. Nano-SIM card slot *	9. 2.5GbE (RJ-45)
4. Headphone / microphone combo jack (3.5mm)	10. Power connector
5. Smart card reader *	11. 2x Thunderbolt 4
6. SD card reader	12. USB-C 3.2 Gen 2

- Notes:
- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i5 / i7 / i9 or Intel Xeon® Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-11500H	6	12	2.9GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i9-11950H	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics
Xeon W-11855M	6	12	3.2GHz	4.9GHz	18MB	DDR4-3200	Intel UHD Graphics
Xeon W-11955M	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Pro 64 for Workstations
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64 for Workstations
- Windows 10 Pro 64
- Windows 10 Pro 64 for Workstations
- Windows 10 Home 64
- Fedora Linux
- Ubuntu Linux LTS
- No operating system

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
NVIDIA® T1200 Laptop GPU	Discrete	4GB GDDR6	60W	DirectX® 12
NVIDIA RTX A4000 Laptop GPU	Discrete	8GB GDDR6	90W	DirectX 12
NVIDIA RTX A5000 Laptop GPU	Discrete	16GB GDDR6	90W	DirectX 12
NVIDIA RTX A2000 Laptop GPU	Discrete	4GB GDDR6	60W	DirectX 12
NVIDIA RTX A3000 Laptop GPU	Discrete	6GB GDDR6	90W	DirectX 12

Monitor Support

Monitor Support

Supports up to 5 independent displays (native display and 4 external monitors via HDMI®, USB-C®, or Thunderbolt™) on hybrid mode only

- HDMI supports up to 4K@60Hz on NVIDIA T1200, 8K@60Hz on other discrete graphics
- USB-C up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 128GB DDR4-3200

Memory Slots

Four DDR4 SO-DIMM slots, dual-channel capable

Memory Type**

- DDR4-3200 ECC
- DDR4-3200 non-ECC

Memory Protection

ECC on models with ECC DIMMs and Xeon processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to three drives, 3x M.2 SSD

- M.2 2280 SSD up to 2TB

Storage Slot^[2]

Three M.2 slots

- Two M.2 2280 PCIe® Gen 3x4 slots, support M.2 2280 SSD
- One M.2 2280 PCIe Gen 4x4 slot, supports M.2 2280 SSD

Storage Type***

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	256GB / 512GB / 1TB	Opal2

RAID^[3]

RAID 0/1 support on two M.2 PCIe Gen 3x4 slots

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
3. Opal capability is not available in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, Dolby® Atmos®

Microphone

- Dual array microphone, far-field
- No microphone

Camera**

- HD 720p, with privacy shutter, fixed focus
- IR & HD 720p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 94Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

MobileMark® 2018: 9 hr
JEITA 2.0: 11.5 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter^{**[1]}

- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 230W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN

Display

Display^{**[1][2]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	700:1	100% sRGB	170°	-
15.6"	FHD (1920x1080)	None	IPS	500 nits	Anti-glare	16:9	1200:1	100% sRGB	170°	Dolby Vision™
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1200:1	100% Adobe® RGB	170°	Dolby Vision, DisplayHDR™ 400
15.6"	UHD (3840x2160)	Multi-touch	OLED	SDR 400nits, HDR 500nits (peak)	Anti-reflection Anti-smudge	16:9	100000:1	100% DCI-P3	170°	Dolby Vision, HDR 500 True Black

Color Calibration

- X-Rite® Pantone® factory color calibration (UHD display)
- No color calibration

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

2. For non-OLED display, HDR is only supported under hybrid mode.

Input Device

Pen

- Lenovo Pen Pro
- No pen (pen sold separately)
- No support (non-touch display doesn't support pen input)

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

LED backlight

UltraNav™

3-button TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical^[1]

Dimensions (WxDxH)

Models	Dimensions
Touch models	375.4 x 252.3 x 25.25-32.2 mm (14.24 x 9.67 x 0.99-1.27 inches)
Non-touch models	375.4 x 252.3 x 24.5-31.45 mm (14.24 x 9.67 x 0.96-1.24 inches)

Weight

Models	Weight
Non-touch models	2.87 kg (6.32 lbs)
Touch models	3.07 kg (6.75 lbs)

Case Color

Black

Case Material

PPS / 50% GF (top), PA / 50% GF (bottom)

Notes:

- 1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet**

- 2.5GbE, Intel Ethernet Connection I225-LM (vPro models), supports Wake-on-LAN
- 2.5GbE, Intel Ethernet Connection I225-V (non-vPro models), supports Wake-on-LAN

WLAN + Bluetooth^{[1][2]}

- Intel Wi-Fi® 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- No WLAN and Bluetooth

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

No support

Notes:

- 1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
- 2. Wi-Fi 6 full features might be limited by country-level restrictions.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0, and DisplayPort™ 1.4)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort 1.4a)
- 1x SD card reader
- 1x Ethernet (2.5GbE RJ-45)

ThinkPad P15 Gen 2

- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)
- 1x HDMI 2.0 (model with NVIDIA T1200 graphics)
- 1x HDMI 2.1 (model with NVIDIA RTX graphics)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C.
For more compatible docking solutions, please visit

[Docking for ThinkPad® P15 Gen 2](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

Touch style fingerprint reader on palm rest, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro

- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^[1]**

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/


- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected

models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW

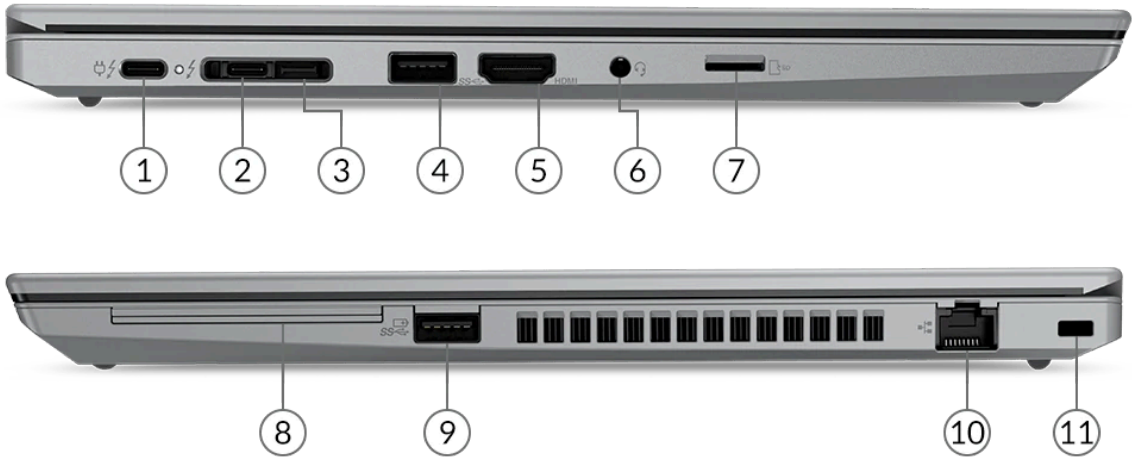

1. Thunderbolt 4	7. MicroSD card reader
2. Thunderbolt 4	8. Smart card reader *
3. Side docking connector *	9. USB 3.2 Gen 1 (Always On)
4. USB 3.2 Gen 1	10. Ethernet (RJ-45) *
5. HDMI 2.0	11. Kensington Security Slot
6. Headphone / microphone combo jack (3.5mm)	

- Notes:
- Ports with * are only available on selected models
 - Optional nano-SIM card slot on the rear side (not shown on the sample product above)
 - The combination of 1, 2 and 3 is side docking connector

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)
- No operating system

Graphics

Graphics**[]

Graphics	Type	Memory	TGP	Key Features
Intel UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12
Intel Iris Xe Graphics	Integrated	Shared	Share CPU TDP	DirectX 12
NVIDIA® T500 Laptop GPU	Discrete	4GB GDDR6	18W	DirectX 12

Notes:

1. Intel Iris Xe Graphics requires dual-channel memory. On models with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics.

Monitor Support

Monitor Support[]

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 4K@60Hz
- Thunderbolt supports up to 5K@60Hz

Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory[]

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200 non-ECC

Notes:

- 1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

One drive, up to 2TB M.2 2280 SSD

Storage Slot^[2]

One M.2 2280 PCIe® Gen 3x4 slot, supports M.2 2242/2280 SSD

Storage Type^{**[3]}

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	-	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	-	Opal2

RAID

No support

Notes:

- 1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
- 2. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
- 3. System comes with one M.2 SSD slot that supports PCIe 3.0

Removable Storage

Optical

None

Card Reader

MicroSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

- Dual array microphone, far-field
- No microphone

Camera^{**}

- HD 720p, with privacy shutter, fixed focus
- IR & HD 720p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

MobileMark® 2018: 9.3 hr
JEITA 2.0: 15.8 hr

Notes:

- 1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**[1][2]

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

1. AC adapter offerings depend on the country.
2. No power adapter is for special bid only.

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	DC dimming
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1400:1	100% Adobe® RGB	170°	Dolby Vision™, DisplayHDR™ 400, DC dimming
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	DC dimming

Color Calibration

- X-Rite® Pantone® factory color calibration (UHD display)
- No color calibration

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical[1]

Dimensions (WxDxH)

365.8 x 248 x 19.1 mm (14.40 x 9.76 x 0.75 inches)

Weight

Models	Weight
Aluminium models	1.783 kg (3.93 lbs)

PC + ABS models	1.75 kg (3.86 lbs)
-----------------	--------------------

Case Color**

- Black
- Storm grey

Case Material**

- Aluminium (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)
- PC + ABS (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet**

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), supports Wake-on-LAN
- No Ethernet (Using optional ethernet adapter or dock)

WLAN + Bluetooth®^{[1][2]}**

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Intel Wi-Fi 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- No WLAN and Bluetooth

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

SIM Card**

- eSIM
- Gemalto eSIM
- No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6 and Wi-Fi 6E full features might be limited by country level restrictions.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps / USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Ethernet (RJ-45)
- 1x Side docking connector
- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via side docking connector (optional), Thunderbolt or USB-C.
For more compatible docking solutions, please visit

[Docking for ThinkPad® P15s Gen 2](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in SoC
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**^[1]

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified Notebooks 8
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications


ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES

OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

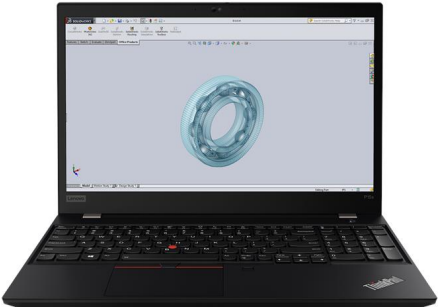

OVERVIEW



1. Headphone / microphone combo jack (3.5mm)	6. Kensington Security Slot
2. SD card reader	7. Power connector
3. HDMI 2.0	8. Thunderbolt 4
4. 2x USB 3.2 Gen 1	9. Smart card reader *
5. Ethernet (RJ-45)	

- Notes:
- Ports with * are only available on selected models
 - Nano-SIM card slot on the rear side (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i5 / i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-11400H	6	12	2.7GHz	4.5GHz	12MB	DDR4-3200	Intel UHD Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i9-11950H	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)

Graphics

Graphics**

Graphics	Type	Memory	TGP
Intel UHD Graphics	Integrated	Shared	Share CPU TDP
NVIDIA® T600 Laptop GPU	Discrete	4GB GDDR6	25W
NVIDIA T1200 Laptop GPU	Discrete	4GB GDDR6	35W
NVIDIA RTX A2000 Laptop GPU	Discrete	4GB GDDR6	35W

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 4K@60Hz
- Thunderbolt supports up to 5K@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200 non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to two drives, 2x M.2 SSD

- M.2 2280 SSD up to 2TB

Storage Slot^[2]

Two M.2 slots

- Two M.2 2280 PCIe® Gen 3x4 slots, support M.2 2280 SSD

Storage Type***

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 3.0	-	256GB / 512GB / 1TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	-	2TB	Opal2

RAID^[3]

RAID 0/1 support

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
3. Opal capability is not available in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader, supports UHS-II SD card

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

- Dual array microphone, near-field
- No microphone

Camera**

- HD 720p, with privacy shutter, fixed focus
- IR & HD 720p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 68Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

MobileMark® 2018: 7.5 hr
JEITA 2.0: 9.5 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter^[1]

135W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	DC dimming
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	1200:1	100% sRGB	170°	-
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1400:1	100% Adobe® RGB	170°	Dolby Vision™, DisplayHDR™ 400, X-Rite® Pantone® Factory Color Calibration, DC dimming
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	DC dimming

Color Calibration

- X-Rite Pantone factory color calibration (UHD display)
- No color calibration

Touchscreen

- On-cell touch, supports 10-point touch (FHD models only)
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

3-button TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical[1]

Dimensions (WxDxH)

366.5 x 250 x 22.7 mm (14.43 x 9.84 x 0.89 inches)

Weight

2.07 kg (4.56 lbs)

Case Color

Black

Case Material

PC + ABS (top), PC + ABS (bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet**

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), supports Wake-on-LAN

WLAN + Bluetooth®^{[1][2]}

Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- Gemalto eSIM
- No SIM card inbox

NFC

No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6 full features might be limited by country-level restrictions.

Ports^[1]

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 1x Thunderbolt 4 / USB 4 40Gbps (support data transfer, Power Delivery 3.0, and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x SD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)
- 1x microSD card slot (WLAN model)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® P15v Gen 2](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

Touch style fingerprint reader on palm rest, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- Hard disk password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**^[1]

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)

- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications


ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW

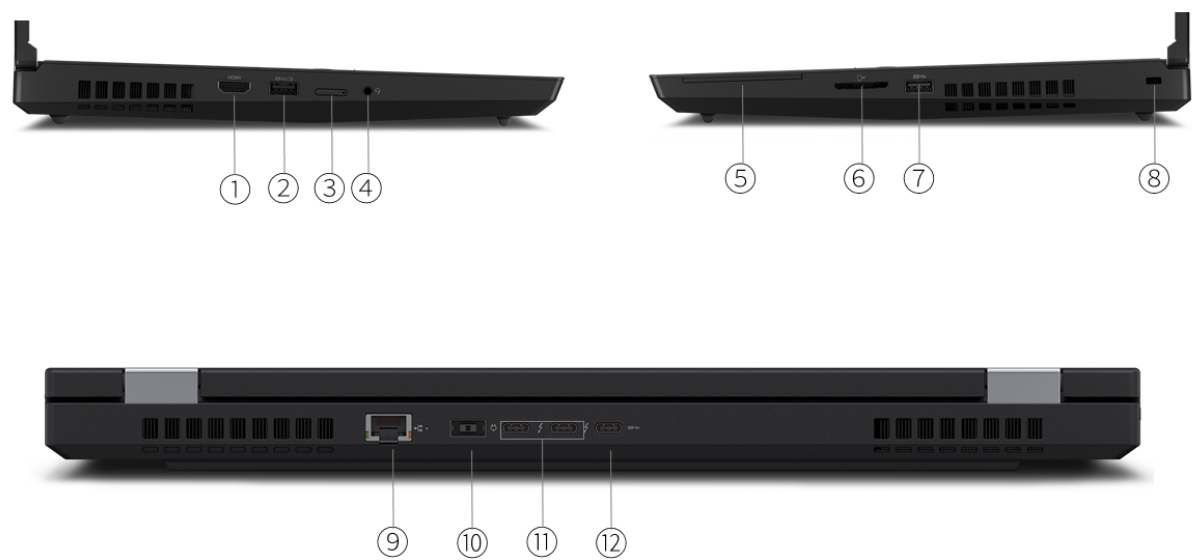

1. HDMI 2.1 / 2.0	7. USB 3.2 Gen 1
2. USB 3.2 Gen 1 (Always On)	8. Kensington Security Slot
3. Nano-SIM card slot *	9. 2.5GbE (RJ-45)
4. Headphone / microphone combo jack (3.5mm)	10. Power connector
5. Smart card reader *	11. 2x Thunderbolt 4
6. SD card reader	12. USB-C 3.2 Gen 2

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i5 / i7 / i9 or Intel Xeon® Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-11500H	6	12	2.9GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i9-11950H	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics
Xeon W-11855M	6	12	3.2GHz	4.9GHz	18MB	DDR4-3200	Intel UHD Graphics
Xeon W-11955M	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Pro 64 for Workstations
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64 for Workstations
- Windows 10 Pro 64
- Windows 10 Pro 64 for Workstations
- Windows 10 Home 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
NVIDIA® T1200 Laptop GPU	Discrete	4GB GDDR6	60W	DirectX® 12
NVIDIA RTX A5000 Laptop GPU	Discrete	16GB GDDR6	115W	DirectX 12
NVIDIA RTX A4000 Laptop GPU	Discrete	8GB GDDR6	115W	DirectX 12
NVIDIA RTX A2000 Laptop GPU	Discrete	4GB GDDR6	60W	DirectX 12
NVIDIA RTX A3000 Laptop GPU	Discrete	6GB GDDR6	115W	DirectX 12

Monitor Support

Monitor Support

Supports up to 5 independent displays (native display and 4 external monitors via HDMI®, USB-C®, or Thunderbolt™) on hybrid mode only

- HDMI supports up to 4K@60Hz on NVIDIA T1200, 8K@60Hz on other discrete graphics
- USB-C up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 128GB DDR4-3200

Memory Slots

Four DDR4 SO-DIMM slots, dual-channel capable

Memory Type**

- DDR4-3200 ECC
- DDR4-3200 non-ECC

Memory Protection

ECC on models with ECC DIMMs and Xeon processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to three drives, 3x M.2 SSD

- M.2 2280 SSD up to 2TB

Storage Slot^[2]

Three M.2 slots

- Two M.2 2280 PCIe® Gen 3x4 slots, support M.2 2280 SSD
- One M.2 2280 PCIe Gen 4x4 slot, supports M.2 2280 SSD

Storage Type***

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	256GB / 512GB / 1TB	Opal2

RAID^[3]

RAID 0/1 support on two M.2 PCIe Gen 3x4 slots

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
3. Opal capability is not available in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, Dolby® Atmos®

Microphone

- Dual array microphone, far-field
- No microphone

Camera

- IR & HD 720p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 94Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 230W AC adapter

Max Battery Life^[4]

MobileMark® 2018: 8.3 hr
JEITA 2.0: 11 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

- Power Adapter**[1]
- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
 - 230W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN

Display

Display**[1][2]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
17.3"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	100% sRGB	170°	-
17.3"	UHD (3840x2160)	None	IPS	500 nits	Anti-glare	16:9	1000:1	100% Adobe® RGB	170°	Dolby Vision™, DisplayHDR™ 400

- Color Calibration
- X-Rite® Pantone® factory color calibration (UHD display)
 - No color calibration

Touchscreen

Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

2. For non-OLED display, HDR is only supported under hybrid mode.

Input Device

- Keyboard
- 6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad
- Keyboard Backlight
- LED backlight
- UltraNav™
- 3-button TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical[1]

- Dimensions (WxDxH)
- 415.44 x 280.81 x 24.31-32.45 mm (16.36 x 11.06 x 0.96-1.28 inches)
- Weight
- Starting at 3.564 kg (7.86 lbs)
- Case Color
- Black

Case Material

PPS / 50% GF (top), PA / 50% GF (bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY**Network****Onboard Ethernet****

- 2.5GbE, Intel Ethernet Connection I225-LM (vPro models), supports Wake-on-LAN
- 2.5GbE, Intel Ethernet Connection I225-V (non-vPro models), supports Wake-on-LAN

WLAN + Bluetooth^{[1][2]}

- Intel Wi-Fi® 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- No WLAN and Bluetooth

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. 6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]**Standard Ports**

- 2x USB 3.2 Gen 1 (one Always On)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0, and DisplayPort™ 1.4)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort 1.4a)
- 1x SD card reader
- 1x Ethernet (2.5GbE RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)
- 1x HDMI 2.0 (model with NVIDIA T1200 graphics)
- 1x HDMI 2.1 (model with NVIDIA RTX graphics)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking**Docking**

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® P17 Gen 2](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

Touch style fingerprint reader on palm rest, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- Self-healing BIOS

Other Security

(Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^[1]**

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications


ISV Certifications

Please visit [ISV certifications for Lenovo Workstations](#)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW

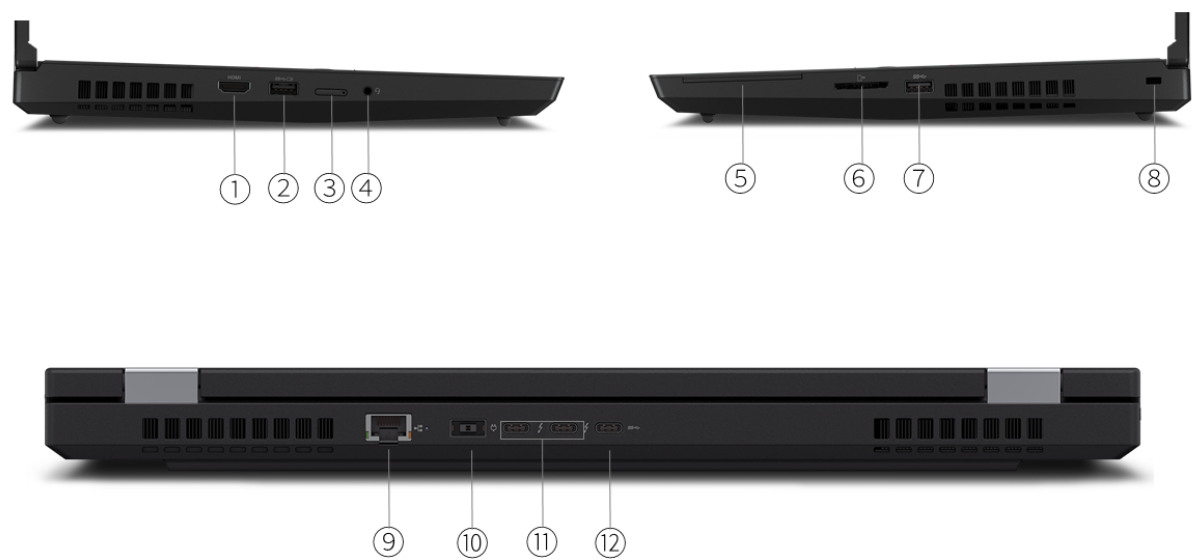

1. HDMI 2.1 / 2.0	7. USB 3.2 Gen 1
2. USB 3.2 Gen 1 (Always On)	8. Kensington Security Slot
3. Nano-SIM card slot *	9. 2.5GbE (RJ-45)
4. Headphone / microphone combo jack (3.5mm)	10. Power connector
5. Smart card reader *	11. 2x Thunderbolt 4
6. SD card reader	12. USB-C 3.2 Gen 2

- Notes:
- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i5 / i7 / i9 or Intel Xeon® Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-11500H	6	12	2.9GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i9-11950H	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics
Xeon W-11855M	6	12	3.2GHz	4.9GHz	18MB	DDR4-3200	Intel UHD Graphics
Xeon W-11955M	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**^[1]

- Windows® 11 Pro 64
- Windows 11 Pro 64 for Workstations
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64 for Workstations
- Windows 10 Pro 64
- Windows 10 Pro 64 for Workstations
- Windows 10 Home 64
- Fedora Linux
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)

Notes:

- As preloaded OS, Fedora and Ubuntu Linux will be available in October 2021

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
NVIDIA® GeForce RTX™ 3070 Laptop GPU	Discrete	8GB GDDR6	90W	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX® 12
NVIDIA GeForce RTX 3080 Laptop GPU	Discrete	16GB GDDR6	90W	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12

Monitor Support

Monitor Support

Supports up to 5 independent displays (native display and 4 external monitors via HDMI®, USB-C®, or Thunderbolt™) on hybrid mode only

- HDMI supports up to 4K@60Hz on NVIDIA T1200, 8K@60Hz on other discrete graphics
- USB-C up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 128GB DDR4-3200

Memory Slots

Four DDR4 SO-DIMM slots, dual-channel capable

Memory Type**

- DDR4-3200 ECC
- DDR4-3200 non-ECC

Memory Protection

ECC on models with ECC DIMMs and Xeon processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to three drives, 3x M.2 SSD

- M.2 2280 SSD up to 2TB

Storage Slot^[2]

Three M.2 slots

- Two M.2 2280 PCIe® Gen 3x4 slots, support M.2 2280 SSD
- One M.2 2280 PCIe Gen 4x4 slot, supports M.2 2280 SSD

Storage Type***

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	256GB / 512GB / 1TB	Opal2

RAID^[3]

RAID 0/1 support on two M.2 PCIe Gen 3x4 slots

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
3. Opal capability is not available in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, Dolby® Atmos®

Microphone

- Dual array microphone, far-field
- No microphone

Camera**

- HD 720p, with privacy shutter, fixed focus
- IR & HD 720p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 94Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

MobileMark® 2018: 7 hr
JEITA 2.0: 11 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter^{**[1]}

- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 230W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN

Display

Display^{**[1][2]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	700:1	100% sRGB	170°	-
15.6"	FHD (1920x1080)	None	IPS	500 nits	Anti-glare	16:9	1200:1	100% sRGB	170°	Dolby Vision™
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1200:1	100% Adobe® RGB	170°	Dolby Vision, DisplayHDR™ 400
15.6"	UHD (3840x2160)	Multi-touch	OLED	SDR 400nits, HDR 500nits (peak)	Anti-reflection Anti-smudge	16:9	100000:1	100% DCI-P3	170°	Dolby Vision, HDR 500 True Black

Color Calibration

- X-Rite® Pantone® factory color calibration (UHD display)
- No color calibration

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

2. For non-OLED display, HDR is only supported under hybrid mode.

Input Device

Pen

- Lenovo Pen Pro
- No pen (pen sold separately)
- No support (non-touch display doesn't support pen input)

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

LED backlight

UltraNav™

3-button TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical^[1]

Dimensions (WxDxH)

Models	Dimensions
Touch models	375.4 x 252.3 x 25.25-32.2 mm (14.24 x 9.67 x 0.99-1.27 inches)
Non-touch models	375.4 x 252.3 x 24.5-31.45 mm (14.24 x 9.67 x 0.96-1.24 inches)

Weight

Models	Weight
Non-touch models	2.87 kg (6.32 lbs)
Touch models	3.07 kg (6.75 lbs)

Case Color

Black

Case Material

PPS / 50% GF (top), PA / 50% GF (bottom)

Notes:

- 1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet^{**}

- 2.5GbE, Intel Ethernet Connection I225-LM (vPro models), supports Wake-on-LAN
- 2.5GbE, Intel Ethernet Connection I225-V (non-vPro models), supports Wake-on-LAN

WLAN + Bluetooth^{[1][2]}

- Intel Wi-Fi® 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- No WLAN and Bluetooth

WWAN^{**}

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

No support

Notes:

- 1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
- 2. 6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0, and DisplayPort™ 1.4)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort 1.4a)
- 1x SD card reader
- 1x Ethernet (2.5GbE RJ-45)

ThinkPad T15g Gen 2

- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)
- 1x HDMI 2.1 (model with Geforce RTX graphics)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit

[Docking for ThinkPad® T15g Gen 2](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

Touch style fingerprint reader on palm rest, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^[1]**

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW



1. Headphone / microphone combo jack (3.5mm)	6. Kensington Security Slot
2. SD card reader	7. Power connector
3. HDMI 2.0	8. Thunderbolt 4
4. 2x USB 3.2 Gen 1	9. Smart card reader *
5. Ethernet (RJ-45)	

- Notes:
- Ports with * are only available on selected models
 - Nano-SIM card slot on the rear side (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-11400H	6	12	2.7GHz	4.5GHz	12MB	DDR4-3200	Intel UHD Graphics
Core i5-11500H	6	12	2.9GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**

- Windows® 10 Pro 64
- Windows 10 Home 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)
- No operating system

Graphics

Graphics**

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12
NVIDIA® GeForce GTX 1650 Laptop GPU	Discrete	4GB GDDR6	DirectX 12

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 4K@60Hz
- Thunderbolt supports up to 5K@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200 non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to two drives, 2x M.2 SSD

- M.2 2280 SSD up to 2TB

Storage Slot

- Two M.2 slots
- Two M.2 2280 PCIe® Gen 3x4 slots, support M.2 2280 SSD

Storage Type***

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	256GB / 512GB / 1TB	Opal2

RAID^[2]

RAID 0/1 support

- Notes:
1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
 2. Opal capability is not available in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, Dolby® Audio™

Microphone

- Dual array microphone, near-field
- No microphone

Camera**

- HD 720p, with privacy shutter, fixed focus
- IR & HD 720p hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 68Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

MobileMark® 2018: 10 hr
JEITA 2.0: 10.6 hr

- Notes:
1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter^[1]

135W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

- Notes:
1. AC adapter offerings depend on the country.

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	DC dimming
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	1200:1	100% sRGB	170°	-
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1400:1	100% Adobe® RGB	170°	Dolby Vision™, DisplayHDR™ 400, DC dimming
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	DC dimming

Touchscreen

- On-cell touch, supports 10-point touch (FHD models only)
- Non-touch

Notes:

- California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

3-button TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical[1]

Dimensions (WxDxH)

366.5 x 250 x 22.7 mm (14.43 x 9.84 x 0.89 inches)

Weight

2.07 kg (4.56 lbs)

Case Color

Black

Case Material

PC + ABS (top), PC + ABS (bottom)

Notes:

- The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet**

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), supports Wake-on-LAN

WLAN + Bluetooth®[1][2]

Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

WWAN

**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- Gemalto eSIM
- No SIM card inbox

NFC

No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6 full features might be limited by country-level restrictions.

Ports^[1]**Standard Ports**

- 2x USB 3.2 Gen 1 (one Always On)
- 1x Thunderbolt 4 / USB 4 40Gbps (support data transfer, Power Delivery 3.0, and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x SD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports^{***}

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking**Docking**

Various docking solutions supported via Thunderbolt or USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® T15p Gen 2](#)

Monitor Cable**Monitor Cable^{***}**

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip^{**}**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

Touch style fingerprint reader on palm rest, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- Hard disk password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^{**[1]}

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test


MIL-STD-810H military test passed

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

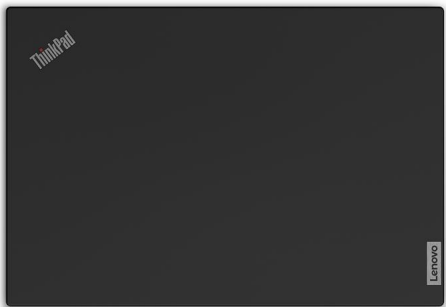

OVERVIEW



1. SD card reader	5. Power connector
2. USB 3.2 Gen 1	6. 2x Thunderbolt 4
3. USB 3.2 Gen 1 (Always On)	7. HDMI 2.0 / 2.1
4. Kensington Nano Security Slot	8. Headphone / microphone combo jack (3.5mm)

- Notes:
- Optional nano-SIM card slot on the right side (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i7-11800H	8	16	2.3GHz	4.6GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i7-11850H	8	16	2.5GHz	4.8GHz	24MB	DDR4-3200	Intel UHD Graphics
Core i9-11950H	8	16	2.6GHz	5.0GHz	24MB	DDR4-3200	Intel UHD Graphics

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Linux
- Ubuntu Linux
- No operating system

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
Intel UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12
NVIDIA® GeForce® RTX™ 3050 Ti Laptop GPU	Discrete	4GB GDDR6	-	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12
NVIDIA GeForce RTX 3060 Laptop GPU	Discrete	6GB GDDR6	-	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12
NVIDIA GeForce RTX 3070 Laptop GPU	Discrete	8GB GDDR6	-	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12
NVIDIA GeForce RTX 3080 Laptop GPU	Discrete	16GB GDDR6	-	Advanced Optimus, Resizable BAR, Dynamic Boost 2.0, DirectX 12

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 4K@60Hz
- Thunderbolt supports up to 5K@60Hz

Chipset

Chipset

Intel WM590 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200

- Notes:
1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

- Model with RTX 3060/3070/3080 graphics: one drive, up to 2TB M.2 2280 SSD
- Model with Intel UHD Graphics or RTX 3050 Ti graphics: up to two drives, 2x M.2 SSD
 - M.2 2280 SSD up to 2TB
 - RAID 0/1 support

Storage Slot^[2]

- Model with Intel UHD Graphics or RTX 3050 Ti Graphics: two M.2 slots
 - One M.2 2280 PCIe® Gen 3x4 slot, supports M.2 2280 SSD
 - One M.2 2280 PCIe Gen 4x4 slot, supports M.2 2280 SSD
- Model with RTX 3060/3070/3080 Graphics: one M.2 slot
 - One M.2 2280 PCIe Gen 4x4 slot, supports M.2 2280 SSD

Storage Type^{***[3]}

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	256GB / 512GB / 1TB	Opal2

RAID^[4]

RAID 0/1 support

- Notes:
1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
 2. M.2 PCIe Gen 4 SSD in the M.2 PCIe Gen 3 slot is downgraded to PCIe Gen 3 performance.
 3. Opal capability is not available in RAID mode.
 4. Both SSD drives work at PCIe Gen 3 performance in RAID mode.

Removable Storage

Optical

None

Card Reader

SD card reader, supports UHS-II SD card

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, 2W x2, Dolby® Atmos®

Microphone^[1]

- Dual array microphone, far-field
- No microphone

Camera^{**[2]}

- FHD 1080p, with privacy shutter, fixed focus
- IR & FHD 1080p hybrid, with privacy shutter, fixed focus
- No camera

- Notes:
1. No microphone is for special bid only.
 2. No camera is for special bid only.

Battery

Battery

Integrated Li-Polymer 90Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

MobileMark® 2018: 10.7 hr
JEITA 2.0: 12.8 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter^{**[1][2]}

- 135W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 230W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.
2. 135W for Intel UHD Graphics, 170W for RTX 3050 Ti Graphics, and 230W for RTX 3060/3070/3080 Graphics.

DESIGN

Display

Display^{**[1][2]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
16.0"	WQXGA (2560x1600)	None	IPS	400 nits	Anti-glare	16:10	1200:1	100% sRGB	170°	Low blue light
16.0"	WQUXGA (3840x2400)	None	IPS	600 nits	Anti-glare	16:10	1500:1	100% Adobe® RGB	170°	Low blue light, Dolby Vision™, DisplayHDR™ 400
16.0"	WQUXGA (3840x2400)	Multi-touch	IPS	600 nits	Anti-reflection, Anti-smudge	16:10	1500:1	100% Adobe RGB	170°	Low blue light, Dolby Vision, DisplayHDR 400

Color Calibration

- X-Rite® Pantone® factory color calibration (WQUXGA display)
- No color calibration

Touchscreen

- Capacitive-type multi-touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
2. In marketing terms, WQXGA is QHD+ and WQUXGA is UHD+.
WQXGA display comes with black paint top cover only.
WQUXGA display comes with black weave top cover only.

Input Device

Pen

- Lenovo Precision Pen 2 with built-in rechargeable battery, 4096 levels of pressure sensitivity, tilt detection, supports WGP, AES 2.0 and MPP 2.0 protocols
- No pen (pen sold separately)

- No support (non-touch display doesn't support pen input)

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

LED backlight

UltraNav™

TrackPoint® pointing device and glass surface multi-touch touchpad

Mechanical^[1]

Dimensions (WxDxH)

Models	Dimensions
Touch models	359.5 x 253.8 x 18.2 mm (14.15 x 9.99 x 0.72 inches)
Non-touch models	359.5 x 253.8 x 17.7 mm (14.15 x 9.99 x 0.7 inches)

Weight

Models	Weight
Touch models	Around 1.86 kg (4.1 lbs)
Non-touch models	Around 1.81 kg (3.99 lbs)

Case Color**

- Black, paint
- Black, weave

Case Material

Carbon fiber hybrid (top), aluminium alloy (bottom)

Notes:

- The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet^[1]

No Ethernet

WLAN + Bluetooth®^{[2][3]}

Intel Wi-Fi® 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

WWAN^[4]

- Qualcomm® Snapdragon™ X55 5G Sub-6 GHz Modem-RF System, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

No support

Notes:

- Ethernet support via optional Lenovo USB-C® to Ethernet Adapter
- Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
- Wi-Fi 6 and Wi-Fi 6E full features might be limited by country level restrictions.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
- WWAN is not available for the models with RTX 3060/3070/3080 graphics.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1

- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x SD card reader
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Power connector

Optional Ports***

- 1x Nano-SIM card slot (WWAN support models)
- 1x HDMI 2.0 (model with integrated graphics)
- 1x HDMI 2.1 (model with discrete graphics)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking**Docking**

Various docking solutions supported via Thunderbolt / USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® X1 Extreme Gen 4](#)

Monitor Cable**Monitor Cable*****

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Nano Security Slot

Smart Card Reader

No smart card reader

Fingerprint Reader

Touch style fingerprint reader on power button, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY**System Management****System Management^[1]**

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^{**[1][2]}

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>
2. No base warranty is for special bid only.

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel




intel



intel



intel

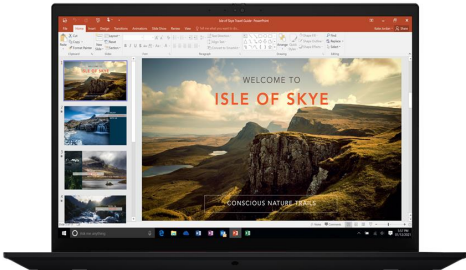

intel